
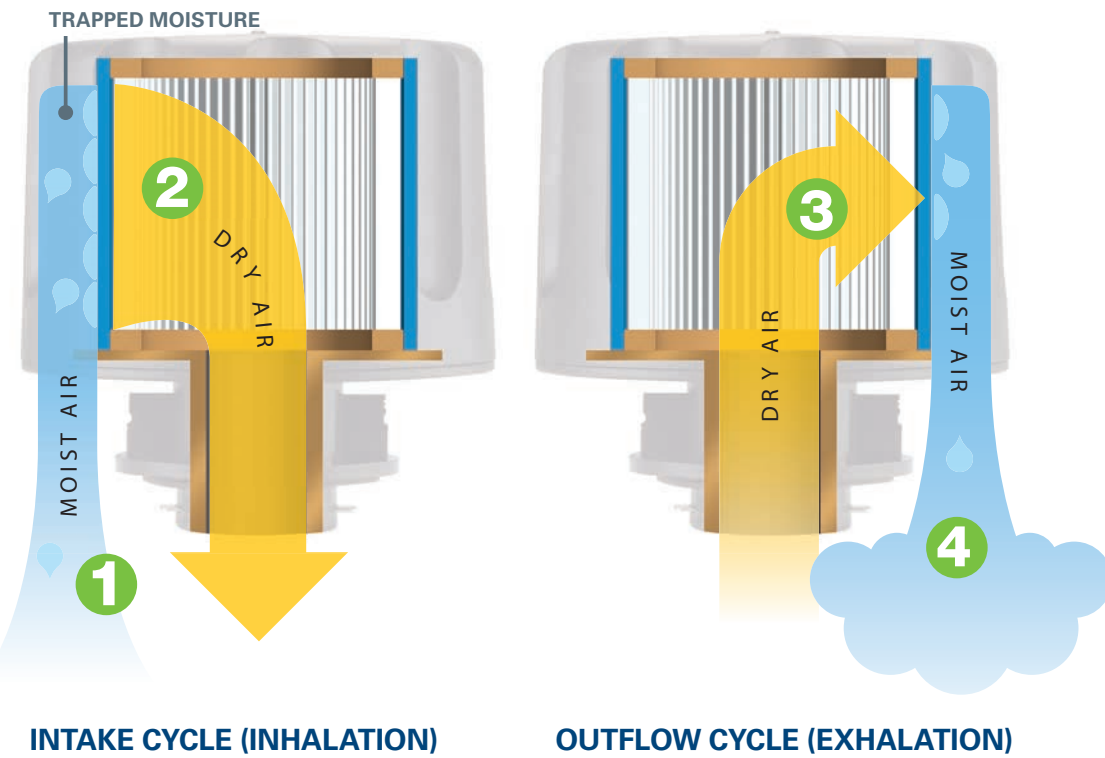


# Moisture Meets its Match

## See How it Works



T.R.A.P.™ breathers from Donaldson are the only breathers on the market that literally strip moisture vapor from intake air and expel the moisture back to the atmosphere on the outflow cycle. The filter continuously regenerates its water holding capacity!



1 The circuit “breathes in” air containing moisture vapor.

2 The T.R.A.P. breather strips moisture and particulate from the incoming air, allowing only clean, dry air to enter the circuit.

3 During the “exhalation” cycle, The T.R.A.P. breather allows unrestricted airflow outward.

4 The outflow of dry air picks up the moisture collected by the T.R.A.P. Breather during intake, and “blows it back out” – fully regenerating the T.R.A.P. breather’s water-holding capacity.

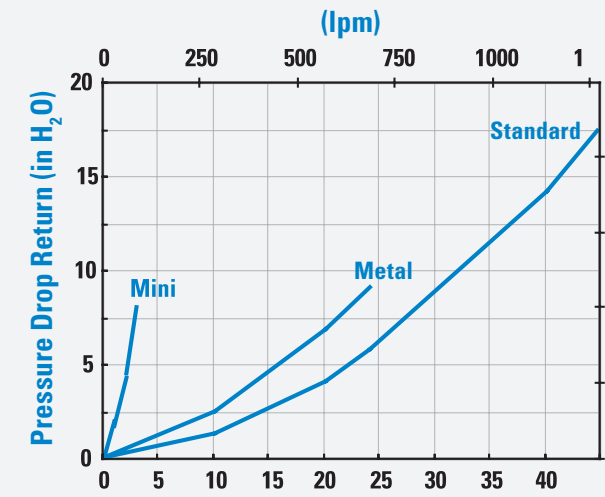


# T.R.A.P.™ Breather Technology

## Eliminates Moisture and Particulate from Reservoirs



### Low Restriction to Air Flow



Apply T.R.A.P. based on fluid exchange rate, not reservoir size.

### Technical Features

#### Particulate Filter

- Highly efficient pleated particulate filter stops particle sizes down to 3 μm at 97%.

#### Service Interval

- Optional mechanical indicator available
- Models with no indicator: change breather every 6 months.

#### Operating Temperature Range

- 40°F to +200°F / -40°C to 93°C

#### Electronic Indicator

- Actuated by pressure differential, flashes red to indicate change out is needed. Indicator setting, 1 PSID (6.9kPa).
- Indicator power source: 3V lithium battery CR2032.

#### Mechanical Indicator Kit

- Install kit between reservoir and T.R.A.P. breather. Lock-up style indicator with manual reset. Highly visible, bright red band shows when restriction limit is reached. Indicator setting 20" H<sub>2</sub>O (5.0 kPa).

#### Caution!

In environments with combustible dusts or vapors, use non-electrical models only.



Donaldson Company, Inc.  
PO Box 1299  
Minneapolis, MN  
55440-1299

[www.donaldsonfilters.com](http://www.donaldsonfilters.com)  
[www.donaldson.com](http://www.donaldson.com)

United States and Canada 800-374-1374  
Mexico, Latin America and  
Caribbean +52-449-910-6150

Brochure No. F11221 (2/11)  
© 2011 Donaldson Company, Inc. All rights reserved.  
Donaldson Company, Inc. reserves the right to change or discontinue any model or specification at any time and without notice. Printed in the U.S.A.



Donaldson Delivers

## T.R.A.P.™ Breather Technology

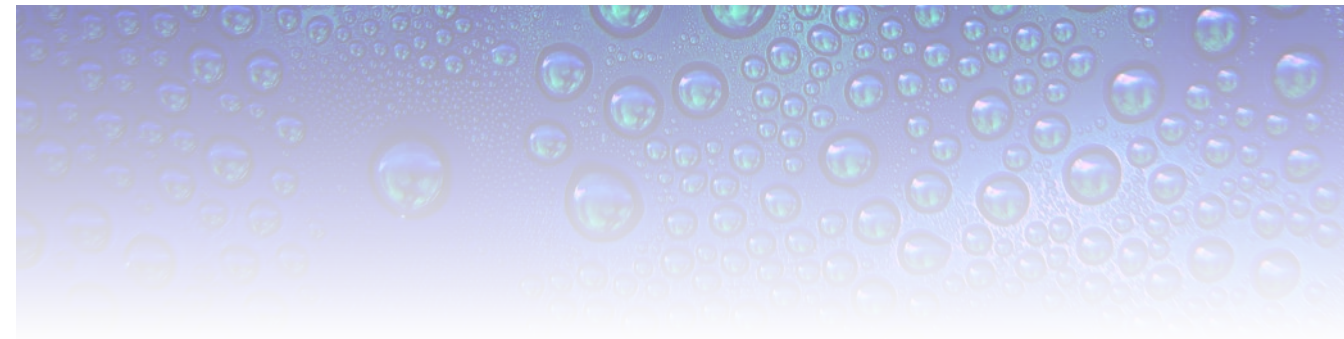
For Hydraulic and Lube Oil Reservoirs

### MOISTURE MEETS ITS MATCH

Donaldson T.R.A.P.™ breathers collect and expel the moisture out of reservoirs, which means you won't need to change the breather due to water saturation ... unlike desiccant filters that require frequent change-out.

TRAP water and particulate before it gets in without restricting air flow – letting your hydraulic and lube oil reservoirs breathe easy.





# Superior Moisture Blocking Advanced Particulate Filtration and Oil Mist Control

## Thermally Reactive Advanced Protection (T.R.A.P.™)

Water has a way of sneaking into your hydraulic circuits – unless you have a Donaldson T.R.A.P. breather standing guard over your system.

Moisture is blocked by Donaldson’s T.R.A.P. breather. In fact, it removes moisture at relative humidity levels as low as 15%. T.R.A.P. filtration technology reacts instantly to changes in thermal conditions – blocking moisture.

T.R.A.P. breathers strip moisture vapor from intake air and releases the moisture back to the atmosphere on the outflow cycle. The filter continuously regenerates its water holding capacity. T.R.A.P. breathers expel the moisture back out, eliminating the need to change the breather due to water saturation ... unlike desiccant filters that require frequent change-out. T.R.A.P. breathers not only protect against moisture but also provide advanced particulate filtration.

TRAP water before it gets in without restricting air flow, letting your hydraulic and lube oil reservoirs BREATHE.




Compare	T.R.A.P. Technology	Desiccant Filters
<b>Service Life</b>	Extended life (expels moisture and refreshes its holding capacity on each cycle).	Shorter life (due to saturation of filtering material), leading to frequent replacement.
<b>Effectiveness</b>	Reacts instantly to conditions in the hydraulic circuit, creating a moisture barrier without impeding airflow.	Requires extended exposure to the air stream before absorption begins. Restricts airflow.
<b>Maintenance costs</b>	Reduced service hours.	Increased service hours.
<b>Technology</b>	Thermally reactive barrier that removes moisture at relative humidity levels as low as 15%.	Absorbent filtering material that loses holding capacity with each cycle.
<b>Filtration</b>	Superior moisture blocking and particulate filtration, down to 3 microns at 97% with up to 7x the media area.	Less effective moisture blocking and particulate filtration with smaller filtration area.
<b>Oil Mist</b>	Built-in coalescing stage.	No oil mist control.
<b>Other Advantages</b>	Will not freeze in winter.	Subject to freezing in winter conditions.

# Extended Range T.R.A.P.™ Breather Technology

Donaldson T.R.A.P. breathers are available in a variety of configurations:

- ABS plastic, nylon or epoxy-coated steel construction
- NPT, BSP, UN straight thread or bayonet connections
- With and without electronic indicator options to fit a broad range of applications


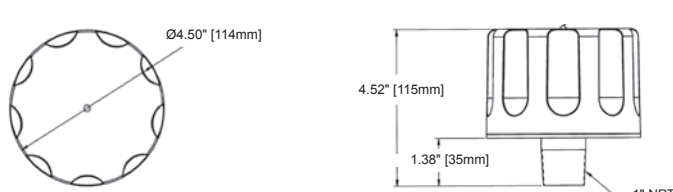
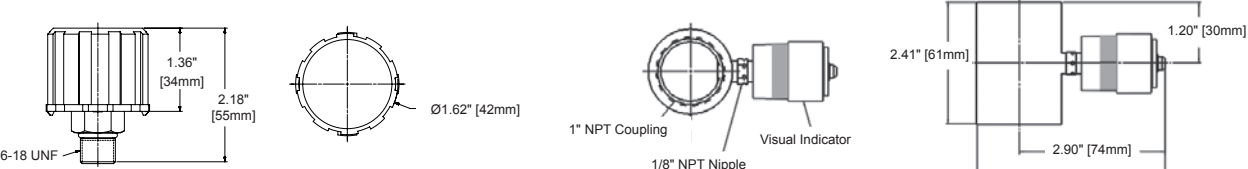

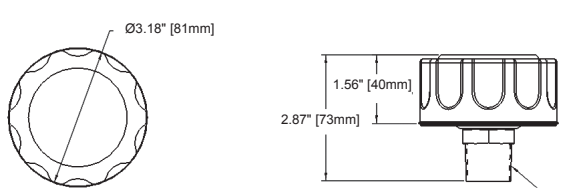

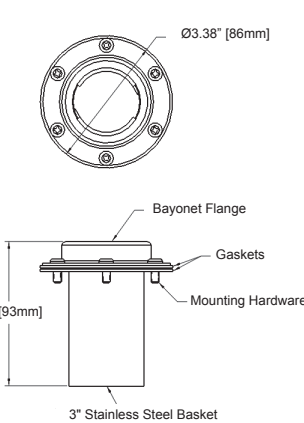
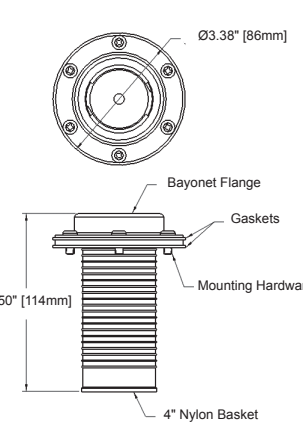
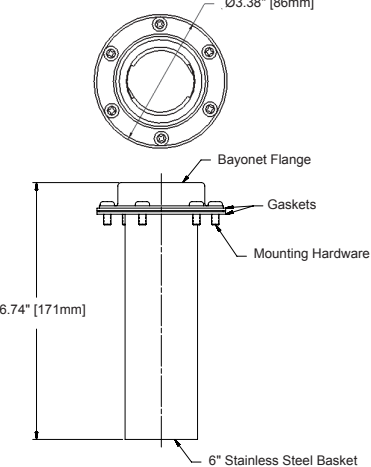
## T.R.A.P. Breather Offering

	Part Number	Construction	Connection	Max Airflow (cfm/lpm)	Indicator	Oil Splash / Mist Containment
 <b>Standard</b>	<b>P566151</b>	ABS	1" NPT	45 / 1274	Optional Mechanical	Yes
	<b>P566156</b>	ABS	Bayonet using adapter	45 / 1274	No	Yes
	<b>P564669</b>	ABS	1" NPT	45 / 1274	Electronic	Yes
	<b>P565616</b>	ABS	Bayonet using adapter	45 / 1274	Electronic	Yes
 <b>Metal</b>	<b>P565857</b>	Epoxy Coated Steel	3/4" NPT	25 / 708	Optional Mechanical	Yes
	<b>P565858</b>	Epoxy Coated Steel	Bayonet	25 / 708	No	Yes
	<b>P566037</b>	Epoxy Coated Steel	3/4" BSP	25 / 708	No	Yes
 <b>Mini</b>	<b>P566174</b>	Glass-filled Nylon	9/16"-18UN	3 / 85	No	Yes
	<b>P567390</b>	Glass-filled Nylon	3/8" NPT	3 / 85	No	Yes
	<b>P567392</b>	Glass-filled Nylon	1/4" NPT	3 / 85	No	Yes

## T.R.A.P. Breather Sizing

Model	Hydraulic Systems (gal/l)	In-plant lube (gal/l)	Outside (gal/l)
<b>Standard</b>	100/375	500/1875	250/938
<b>Metal</b>	40/150	200/750	100/375
<b>Mini</b>	4/15	20/75	10/38

## T.R.A.P. Breather Specifications

Standard	Top View	Metal	Top View	Mini	Top View	
<b>P565616</b> <b>P566156</b> (no indicator version) <i>Available with or without electronic indicator</i>	 Dimensions: 3.38" [85.8mm] height, 6.56" [166.5mm] diameter, Bayonet Adaptor	<b>P564669</b> (optional mechanical) <b>P566151</b> (no indicator version)	 Dimensions: 4.52" [115mm] height, 1.38" [35mm] diameter, 1" NPT	<b>P566174</b> <b>P567390</b> <b>P567392</b>	 Dimensions: 1.36" [34mm] height, 2.18" [55mm] diameter, 9/16-18 UNF, 1" NPT Coupling, 1/8" NPT Nipple, Visual Indicator, 2.41" [61mm] diameter, 1.20" [30mm] height, 2.90" [74mm] diameter, 3.75" [95mm] diameter	
	 Dimension: Ø4.50" [114mm]	<b>P565857</b> (3/4" NPT version, optional mechanical) <b>P566037</b> (3/4" BSP version)	 Dimensions: 1.56" [40mm] height, 2.87" [73mm] diameter, 3/4" NPT or 3/4" BS	<b>Mechanical Indicator Kit P566168</b> <i>Suitable for use with P566151 and P565857*</i> <i>*Requires additional 3/4" x 1" reducer bushing (supplied by customer)</i>	 Dimension: Ø1.62" [42mm]	
				<b>Bayonet Style Filler Basket/Flange Kits</b> <i>Use with any bayonet style T.R.A.P. Breather</i>		
				<b>P566321</b>	<b>P563874</b>	<b>P563453</b>
				 Dimensions: 3.68" [93mm] height, Bayonet Flange, Gaskets, Mounting Hardware, 3" Stainless Steel Basket	 Dimensions: 4.50" [114mm] height, Bayonet Flange, Gaskets, Mounting Hardware, 4" Nylon Basket	 Dimensions: 6.74" [171mm] height, Bayonet Flange, Gaskets, Mounting Hardware, 6" Stainless Steel Basket