


- Ultra-Web® nanofiber media ensures longer filter life at a significantly lower pressure drop
- Superior particle release due to surface filtration
- Fluted media construction prevents bridging in fibrous or agglomerative applications
- Smaller and lightweight filter pack design with built-in handles
- Easy filter changeout for quicker maintenance – no tools required
- MERV* 13 filtration efficiency rating per ASHRAE 52.2-2007



PowerCore® CP Filter Pack
(Available in Standard, Spunbond and Anti-Static)

PROVEN TECHNOLOGY THAT PERFORMS


Proven and proprietary Ultra-Web® filter media delivers longer filter life, cleaner air and greater cost savings than other traditional filter media. It is made with an electrospinning process that produces a very fine, continuous, resilient fiber of 0.2-0.3 microns in diameter.

PowerCore filter packs with Ultra-Web media keep dust on the surface of the fluted channels where it is easily cleaned off unlike conventional filter bag material that depth loads, like 16 oz. (453.6 g) polyester.


- Surface loading promotes filter cleaning and longer life
- Better pulse cleaning lowers operational pressure drop and energy use

SEM† IMAGES

1 micron = 1/25,400 of an inch (1/1,000 millimeters)

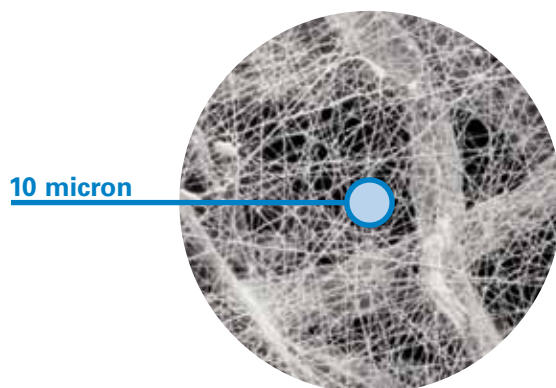

Ultra-Web Nanofiber Technology (600x)

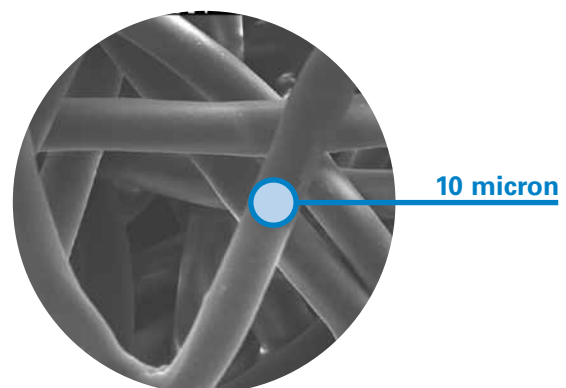

16 oz. Polyester (600x)

† Scanning Electron Microscope.
* Refer to Technical Information on page 2.

APPLICATIONS

- Premium performance on fine, dry, fibrous and/or abrasive dust
- Longer life in aggressive/challenging applications
- Optional Spunbond or Anti-Static (AS) media available
- Spunbond version has excellent moisture and chemical resistance

MEDIA COMPATIBILITY DATA		
Temperature Resistance	150°F 65°C	
Moisture Absorption**	Maximum 14% @ 70°F (21°C) and 65% RH	
Chemical Tolerance***	Acids→Poor Bases→Fair	Oxidants→Poor Solvents→Fair
Abrasion Resistance	Excellent per TAPPI 476 (Taber Method)	
Moisture Absorption** for Spunbond	0.2–0.5% @ 70°F (21°C) and 65% RH	
Chemical Tolerance*** for Spunbond	Acids→Good Bases→Good	Oxidants→Good Solvents→Good

SPECIFICATIONS

MEDIA COMPOSITION	
Nanofiber Technology	Durable proprietary synthetic filter media fiber and polymer Mean fiber diameter of 0.2 µm
Substrates	<ul style="list-style-type: none"> • Proprietary blend of cellulose fibers • Spunbond Polyester • Anti-static (AS) version per ESD STM 11.11-2001 Resistance less than 10⁸ OHM

MEDIA EFFICIENCY	
U.S. Efficiency Rating	MERV* 13 per ASHRAE 52.2-2007
FILTER PACK CONSTRUCTION	
Standard Construction	Obround design Fluted media configuration Urethane gasket Built-in handle

CURRENT AVAILABLE CONFIGURATIONS

Collector Models	Dimensions		PowerCore		
	in	mm	Standard	Spunbond	Anti-Static
CPC	22.3 x 7.5 x 7.0	566.42 x 190.50 x 177.80	•	•	•
CPV	22.3 x 7.5 x 7.0	566.42 x 190.50 x 177.80	•	•	•

* The Minimum Efficiency Reporting Value (MERV) of this filter cartridge has been determined through independent laboratory testing using ASHRAE 52.2 (2007) test standards. The MERV rating was determined at a face velocity of 118 feet per minute (36.0 meters per minute) and loading up to four inches (101.6 millimeters) water gauge. Actual efficiency of any filter cartridge will vary according to the specific application parameters. Dust concentration, airflow, particle characteristics, and pulse cleaning methods all affect filtration efficiency.

** Environmental conditions involving combinations of high temperature, corrosive material, and moisture can reduce media strength. Reduction in media strength may compromise cartridge integrity and performance.

*** A combination of chemicals may alter fiber resistance to the specified performance level. Chemical attack may compromise cartridge integrity and performance.

Significantly improve the performance of your collector with genuine Donaldson Torit replacement filters and parts. **Call Donaldson Torit today 800-365-1331.**



Tel 800-365-1331 (USA)
Tel 800-343-3639 (within Mexico)
donaldsontorit@donaldson.com
donaldsontorit.com
Donaldson Company, Inc.
Torit
P.O. Box 1299
Minneapolis, MN
55440-1299 U.S.A.

EXACTLY WHAT YOU NEED.™

Powercore CP Filter Pack (11/12)
© 2009 Donaldson Co., Inc. All Rights Reserved. All products, product specifications, and data (airflow, capacity, dimensions, or availability) are subject to change without notice, and may vary by region or country. Donaldson Torit, Torit PowerCore, Ultra-Web, and the color blue are registered trademarks of Donaldson Company, Inc. Contains Donaldson proprietary technology.