


- Flame-retardant Ultra-Web® nanofiber media ensures longer filter life at a significantly lower pressure drop
- Surface filtration offers superior particle release
- Fluted construction allows more effective filter area to be packaged in smaller spaces
- Filter pack is designed with easy-grip handle
- Easy filter changeout for quick maintenance — no tools required.
- MERV\* 13 filtration efficiency rating per ASHRAE 52.2-2007



**PowerCore® TG Filter Pack**  
(available in flame-retardant and anti-static)

## PROVEN TECHNOLOGY THAT PERFORMS


Proven and proprietary Ultra-Web® filter media delivers longer filter life, cleaner air and greater cost savings than other traditional filter media. It is made with an electrospinning process that produces a very fine, continuous, resilient fiber of 0.2-0.3 microns in diameter.

PowerCore filter packs with Ultra-Web media keep dust on the surface of the fluted channels where it is easily cleaned off unlike conventional filter bag material that depth loads, like 16 oz. (453.6 g) polyester.


- Surface loading promotes filter cleaning and longer life
- Better pulse cleaning lowers operational pressure drop and energy use

## SEM† IMAGES

1 micron = 1/25,400 of an inch (1/1,000 millimeters)

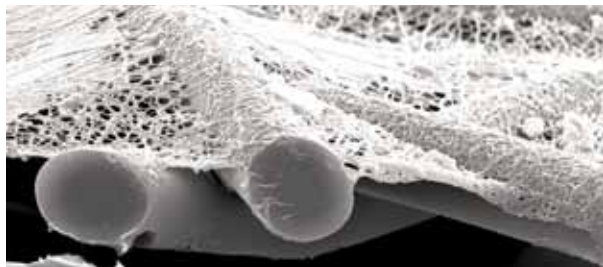

**Clean Ultra-Web Media**

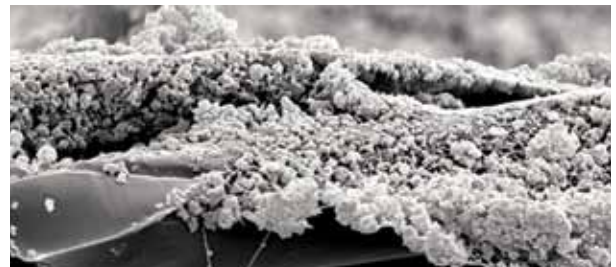

**Surface-Loaded Ultra-Web Media**  
(substrate still clean)

† Scanning Electron Microscope.

\* Refer to Technical Information on page 2.

## APPLICATIONS

- Premium performance on fine, dry, fibrous and/or abrasive dust
- Longer life in aggressive/challenging applications
- Optional anti-static (AS) media available

MEDIA COMPATIBILITY DATA	
Temperature Resistance	150°F 65°C
Moisture Absorption**	Maximum 14% @ 70°F (21°C) and 65% RH
Chemical Tolerance***	Acids→Poor      Oxidants→Poor Bases→Fair      Solvents→Fair
Abrasion Resistance	Excellent per TAPPI 476 (Taber Method)

## SPECIFICATIONS

MEDIA COMPOSITION	
Nanofiber Technology	Durable proprietary synthetic filter media fiber and polymer Mean fiber diameter of 0.2 µm
Substrate	Proprietary blend of cellulose fibers Flame-retardant version per UL <sup>†</sup> Standard 558, TAPPI Standard T 461 om-94, and DIN 53438 Part 3 Anti-static version per ESD STM 11.11-2001 Resistance less than 10 <sup>8</sup> OHM

MEDIA EFFICIENCY	
U.S. Efficiency Rating	MERV* 13 per ASHRAE 52.2-2007

FILTER PACK CONSTRUCTION	
Standard Construction	Rectangle design Metal casing Fluted media configuration Urethane gasket Built-in handle

## CURRENT AVAILABLE CONFIGURATIONS

Collector Models	Dimensions		PowerCore	
	in	mm	Standard	Anti-Static
TG	36.2 x 16.7 x 5.3	919.5 x 424.2 x 134.6	•	•

† UL is a registered trademark of Underwriters Laboratories, Inc.

\* The Minimum Efficiency Reporting Value (MERV) of this filter cartridge has been determined through independent laboratory testing using ASHRAE 52.2 (2007) test standards. The MERV rating was determined at a face velocity of 118 feet per minute (36.0 meters per minute) and loading up to four inches (101.6 millimeters) water gauge. Actual efficiency of any filter cartridge will vary according to the specific application parameters. Dust concentration, airflow, particle characteristics, and pulse cleaning methods all affect filtration efficiency.

\*\* Environmental conditions involving combinations of high temperature, corrosive material, and moisture can reduce media strength. Reduction in media strength may compromise cartridge integrity and performance.

\*\*\* A combination of chemicals may alter fiber resistance to the specified performance level. Chemical attack may compromise cartridge integrity and performance.

Significantly improve the performance of your collector with genuine Donaldson Torit replacement filters and parts. **Call Donaldson Torit today 800-365-1331.**



Tel 800-365-1331 (USA)  
Tel 800-343-3639 (within Mexico)  
donaldsontorit@donaldson.com  
donaldsontorit.com

Donaldson Company, Inc.  
Torit  
P.O. Box 1299  
Minneapolis, MN  
55440-1299 U.S.A.

**EXACTLY WHAT YOU NEED.™**

**Powercore TG Filter Pack (11/12)**  
© 2009 Donaldson Co., Inc. All Rights Reserved. All products, product specifications, and data (airflow, capacity, dimensions, or availability) are subject to change without notice, and may vary by region or country. Donaldson Torit, Torit PowerCore, Ultra-Web, and the color blue are registered trademarks of Donaldson Company, Inc. Contains Donaldson proprietary technology.